




MOTION
SMART SENSOR SERIES
#SmartSense

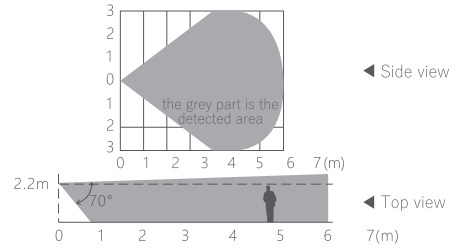

DESCRIPTION

The Motion Sensor enables you to detect the movement of people in your room and then lets you automate & trigger multiple other smart devices connected to your Hogar SE Gateway & App. The Motion Sensor is compact and can be retrofitted in any angle.

Once a trigger is set off in the Working Mode of the Motion Sensor, the Sensor enters into a one minute Sleep State before returning to Working Mode.



PEOPLE TRIGGER



ZIGBEE COMPATABILITY



EASY INSTALLATION



LINKAGE TO OTHER SMART DEVICES



APP CONTROL



VOICE CONTROL

SPECIFICATIONS

Model No.	HSE-PIR-001
Battery Type	CR2450
Static Current	<= 10 μ A
Dimensions	40 x 48 mm
Operating Temperature	-10° C - +55 °C
Humidity	0 - 95%
Wireless Protocol	ZigBee 3.0
Transmit Frequency	2.4000~2.4835 GHz
Detection Distance	7m
Detection Angle	70°
Installation Height	2.2m

PRE INSTALLATION MANDATORY CHECKS

- Place the Motion Sensor in an area where you expect people movement/anticipate intruders who need to be detected:

INSTALLATION


- You can either wall-mount the Motion Sensor with 3M glue or place it on your desk. The Sensor's magnetic base enables flexible & convenient installations.

ADDING MOTION SENSOR TO YOUR HOME

- Open the Hogar SE App and go to "Rooms".
- Click on "+" Button and select "Motion Sensor". Follow the prompts on your App for subsequent steps.
- Open the front cover of your Motion Sensor by turning it **COUNTERCLOCKWISE** & remove the battery insulation strip.
- To **POWER ON** the Motion Sensor, **Press and Hold** the button for 5 seconds.
- You will soon see the **BLUE LED** flash that indicates that the Motion Sensor has entered into **Enrolling Mode**.
- Click "**Confirm Indicator Rapidly Blink**" on your Hogar SE App.

Reset the device first.

Power on the device and confirm that indicator light rapidly blinks



Resetting Devices >

Confirm indicator rapidly blinking

- Your Motion Sensor is now successfully added to your Hogar SE App.

WARRANTY

Hogar Provides Limited Warranty of 18 months on every product.

ENQUIRY

For Orders/Details, kindly reach out to us at info@hogarcontrols.com



Scan QR code for more details on warranty and sales enquiries